



RECALL SAFETY SNEAKER



Slip Resistance
Maximum Category



Composite
Toecap



Anti-Perforation
Insole



Anti-Static



Fuel Oil
Resistant
Outsole



S3 SRC

RECALL SAFETY SNEAKER

COMPOSITION

UPPER	Water Resistant Fabric
LINING	Anti-bacterial / Breathable Textile Lining
TOECAP	Composite 200J EN12568:2010
INSOCK	Fabric, High-density foam; Breathable, Antibacterial, Antistatic
INSOLE	On-Protector Zero Perforation
OUTSOLE	Fuel Oil Resistant Anti-Static Polyurethane (PU)

STANDARD


EN ISO 20345:2011

AVAILABLE SIZES

36 to 47 EU

REMINDER

REINFORCED PROTECTION

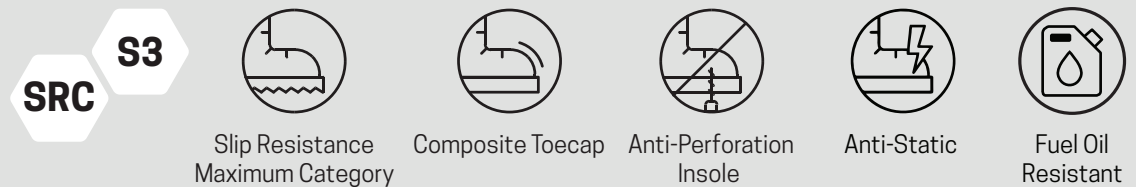

SRC: HIGH PERFORMANCE GRIP COMBINING SRA & SRB CHARACTERISTICS

	SRA		SRB	
Surface	Ceramic floor		Steel Floor	
Lubricant	Sodium laurysulfate		Glycerine	
Foot Position				
Standard Demands	≥0,32	≥0,28	≥0,18	≥0,13

Safety sneakers made with water resistant textile in conformity with the requirements of the **EN ISO 20345:2011**, acquiring the **S3** safety category (water resistant upper, anti-perforation insole and protection toecap). Equipped with a **PU** outsole that offers greater durability and excellent slip resistance performance (**SRC**).

